

一次性脉搏血氧饱和度探头 Disposable SpO₂ Sensor



LAUNCH 元和电子

PROFESSIONAL

MANUFACTURER OF MEDICAL ACCESSORIES

专业的医疗电子设备附件制造商

2014 产品目录
PRODUCT CATALOGUE



元和电子于2001年创立于深圳，为国家高新技术企业，以医用监护配件业务为主的医疗器械企业，专业致力于医疗电子诊断、监护设备附件与耗材的研发、生产与销售。产品广泛应用于心电监护仪、心电图诊断仪、胎心监护仪、脑电图仪、脉搏血氧仪、肌电诱发仪、超声诊断仪等医疗电子设备。为国内外众多知名医疗设备品牌提供附件OEM配套服务。

Shenzhen Launch Electrical CO.,LTD was founded in 2001 in Shenzhen, which professionally commits to the research and development, manufacture and sales for all the accessories of the devices for Medical Electronic Diagnosis and Monitoring Equipment. Our products are extensively used for ECG Monitors, Electrocardiographs, Foetus ECG Monitor, EEG diagnostic Instrument, Oximeters, Ultrasonic monitor and other Med.



公司资质/ Qualifications

质量体系：TUV ISO 13485

生产许可证号：粤食药监械生产许20030757号

医疗器械注册标准号：YZB/粤0020-2011及YZB/粤0260-2012

医疗器械注册证号：粤食药监械（准）字2011第2210075号；粤食药监械（准）字2012第2210870号

【产品适用范围】：在医院或其它医疗机构，与适用型号的血氧仪或监护仪配套，采集和传递人体脉搏与血氧饱和度生理信息。

【Scope of Application】：





used in conjunction with the appropriate monitor, the oximetry sensor is used in hospitals or other medical institutions. It is used for collecting and transmitting the pulse of the human body and the blood oxygen saturation physiological information, transferring this into a digital signal that is interpreted and displayed by the monitor.

兼容机型/ Compatible


■ BCI Oximeter BCI 血氧仪	■ CSI Oximeter CSI 血氧仪	■ Datascope Oximeter Datascope 血氧仪	■ Datex Oximeter 德恩血氧仪
■ Nellcor Oximeter 奈普特血氧仪	■ Nihon Konden Oximeter 日本光电血氧仪	■ Ohmeda Oximeter 欧美达血氧仪	■ OEM Service 定制机型产品

产品规格 Specification


插头 Connector	1.0mm镀金端子, PVC注塑成型 1.0mm Golden plated pins, PVC plug	连接可靠, 信号传输稳定。 Reliable connection, stable signal transmission.
线材 Cable material	白色, PVC外被, 双层屏蔽, 直径3.25mm White, PVC Jacket, Double-shielded, OD:3.25mm	外被弹性PVC抗撕裂, 双层屏蔽设计抗干扰。材料通过生物兼容性测试, 无毒环保。 Outer flexible PVC coating resists tear. Double shield design is resistant to interference. Materials passed biological compatibility testing and are non-toxic, promoting the environmental aspects.
发光管 LED	660nm/905nm/940nm 660nm/905nm/940nm	选用国际知名品牌材料, 性能稳定, 质量可靠。 Using international branded materials that have stable properties, and are reliable quality.
接收管 Photo Detector	8mm (大小) 8mm (size)	选用国际知名品牌材料, 性能稳定, 质量可靠。 Using international branded materials that have stable properties, and are reliable quality.
产品长度 Cable length	成人/儿童: 0.45m; 婴儿/新生儿: 0.9m Adult/Pediatric: 0.45m; Infant/Neonate: 0.9m	长度适中, 适用于监测不同需求的病人。 Moderate lengths, suitable for patient with different needs.
产品包装 Package	25个/盒, 14盒/箱 24pcs/box, 14box/box	包装规范, 可拆分销售。 Standard packing, can be split for easier sales.
探头端绑带材质 Sensor tape	粘贴式无纺布、邦迪布、泡沫棉; 非粘贴式蓝色海绵、魔术贴绑带 Adhesive-fabric, Bangdi cloth, white foam; non-stick-blue foam, velcro straps	适用于监测不同需求的病人, 材料通过生物兼容性测试, 无毒环保。 Suitable for monitoring patients with different needs. Materials passed biological compatibility testing and are non-toxic, promoting the environmental aspects.

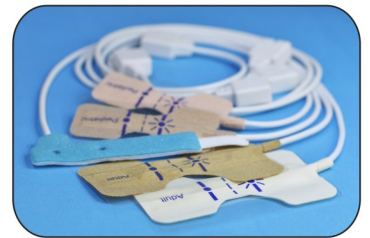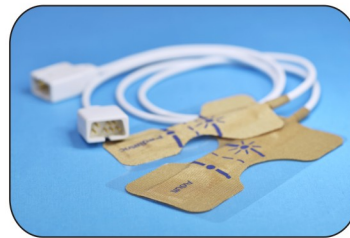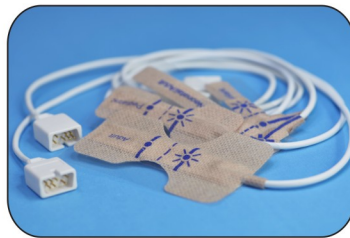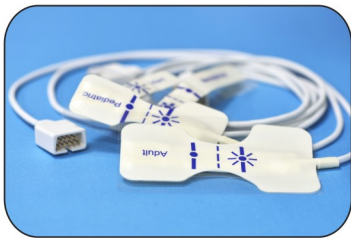


探头端类型 Sensor Style




成人
Adult
>30kg



儿童
Pediatric
10-50kg



婴儿
Infant
3-20kg

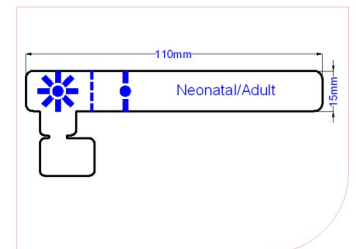

新生儿/成人
Neonate/Adult
<3kg, >30kg

专业品质 全球共享

SHARING PROFESSIONAL QUALITY WITH WORLD

www.launchsz.com



LAUNCH

深圳市元和电子材料有限公司

Shenzhen Launch Electrical Co.,LTD

地址：深圳市龙华新区观澜街道章阁社区中港星工业园F栋

Add: NO.F Building Zhonggangxing Industrial Estate, Zhangge Community,
Guanlan Street, Longhua, Shenzhen, China

TEL: +86-755-29532401 FAX: +86-755-29532483

E-mail: yuanhe@cnlaunch.com; guiqing.liu@cnlaunch.com

本简介内所显示之注册商标、品名、型号等所有
权均为其原持有者所有，本文只是引用。
特此声明。

The brands or registered trade mark listed
in files are belong to the respected owners
of the properties.



SFDA

CE 0123